

COLOR INFUSED



Color Infused
MODULAR ACOUSTIC FLOORING



TAJ-6533C Batten-Daybreak



TAJ-6541X Board-Ice



TAJ-6557C Balance-Coal
TAJ-6537C Batten-Coal



TAJ-6531C Batten-Ice
TAJ-6537C Batten-Coal





TAJ-6551C Balance-Ice



TAJ-6540X Board-Buff



TAJ-6557C Balance-Coal



TAJ-6545X Board-Lodge



HOT COCOA
&
COFFEE
BAR
Love is Brewing

WINE A BIT
IS
BETTER
ALWAYS
FOR A GLASS
WINE

Save
Water
WINE
ONES
FRIENDS
DRINK
SOMEONE

WINE
LIFE
TOO SHORT
DRINK

BOARD

BATTEN


BALANCE

BOARD

BATTEN

BALANCE

LEAF

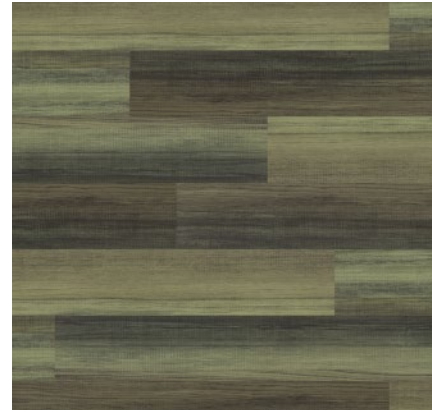

TAJ-6542X



TAJ-6532C



TAJ-6552C

BUFF



TAJ-6540X



TAJ-6530C



TAJ-6550C

ICE



TAJ-6541X



TAJ-6531C



TAJ-6551C

TRUFFLE



TAJ-6546X



TAJ-6536C




TAJ-6556C

DAYBREAK



TAJ-6543X

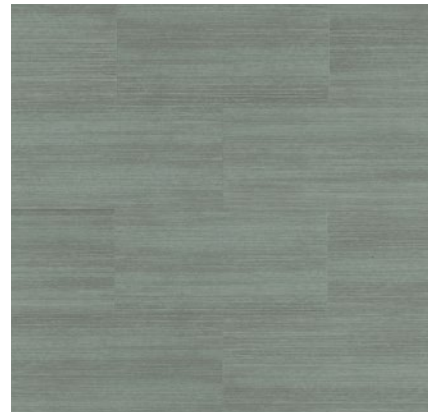

TAJ-6533C



TAJ-6553C

COAL



TAJ-6547X



TAJ-6537C



TAJ-6557C

CURRY



TAJ-6544X



TAJ-6534C



TAJ-6554C

LODGE



TAJ-6545X



TAJ-6535C



TAJ-6555C

Additional Batten colors can be found in the Spectrum Collection

Visit tajflooring.com for more images of all colors

Color Infused

Technical Specification Information

TAJ Color Infused is a high performance 5mm fiberglass reinforced modular acoustic flooring product with a non-slip backing. This advanced modular construction allows for multiple installation options in varied commercial end use applications. TAJ Color Infused is appropriate for use over raised access floor panels, excellent for limiting sound transmission, and installs nicely next to carpet tile without the need for transition strips.

Classification: ASTM F1700 Class III
Type B (embossed)

Overall Thickness: 5.0mm

Dimensions:
Plank 7.25"x 48.5" nominal (7.36"x 48.46" actual)
Slab 12"x24" nominal (11.97" x 23.9" actual)

Wear Layer Thickness: .5mm, 20mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech Plus (Ceramic Bead Infused UV Cured Polyurethane with anti-microbial technology)

Edge Detail: Square Edge (no bevel)

Warranty: 15 year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing or the use of toxic chemicals

Static Load Limit: ASTM F970 modified, passes at 1,000 psi, residual compression maximum 0.005"

Chemical and Stain Resistance: ASTM F925, Excellent
No surface dulling, surface attack, or color change with 5% acetic Acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

Slip Resistance: ASTM C1028-89, >0.6

Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesives: LED IEQ4.1

Recycled Content: 100% Phthalate Free Virgin Materials

Impact Sound Conduction: ASTM E492, IIC 57

Airborne Sound Transmission Loss: ASTM E90, STC 62

Indoor Air Quality: CHPS 1350 Certified

Indoor Air Quality: FloorScore Certified

Plant Certifications: ISO14001, ISO9001



Revit files available for download at tajflooring.com.

*For details on Health and Environmental Product Declarations, recycled content please email request to info@tajflooring.com

Visit us at tajflooring.com for complete specifications and to order samples.



740 Church Road, Elgin, IL 60123
(888) 652-2111 | tajflooring.com