




INTERLOCKING TILE



Precision cut tabs fit together tightly allowing lock down tile to be used in a wide range of applications.


Advantages of Lockdown

- Unique Interlock System
- Fast & Economical Installation
- Sound Absorbing
- Floor Over Floor Encapsulation
- Easy to Install, Remove & Replace
- Superior Dimensional Stability
- Low VOC Flooring
- Suitable for Heated Floors
- Precision Cut Water Resistant Seam
- Portable
- Designed for Heavy Commercial Applications

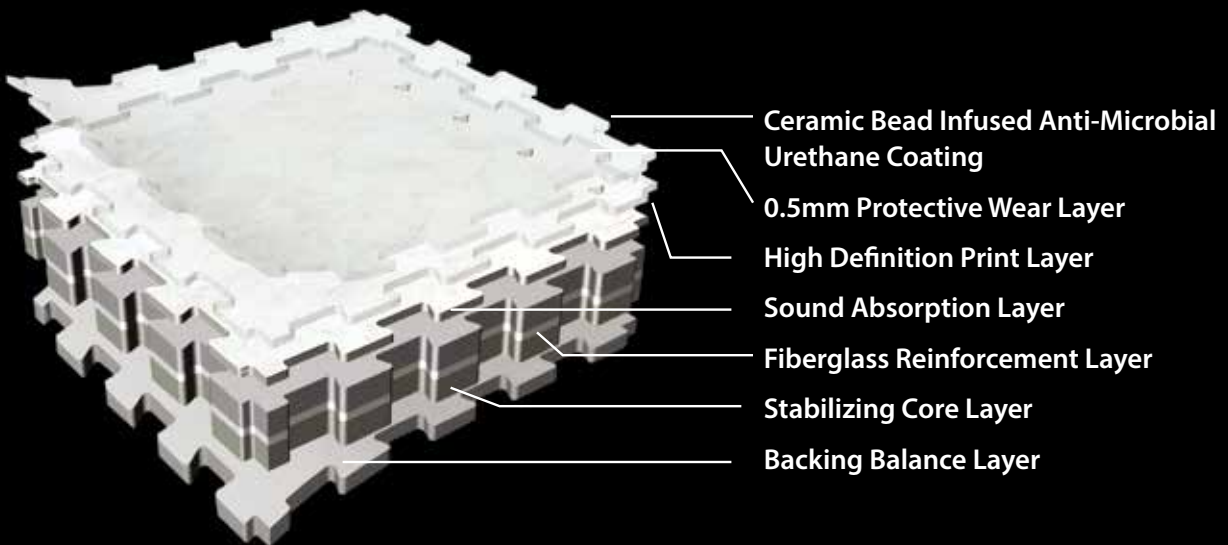



TAJ-8001Y Lockdown Dark | 18" x 18" Interlocking Tile

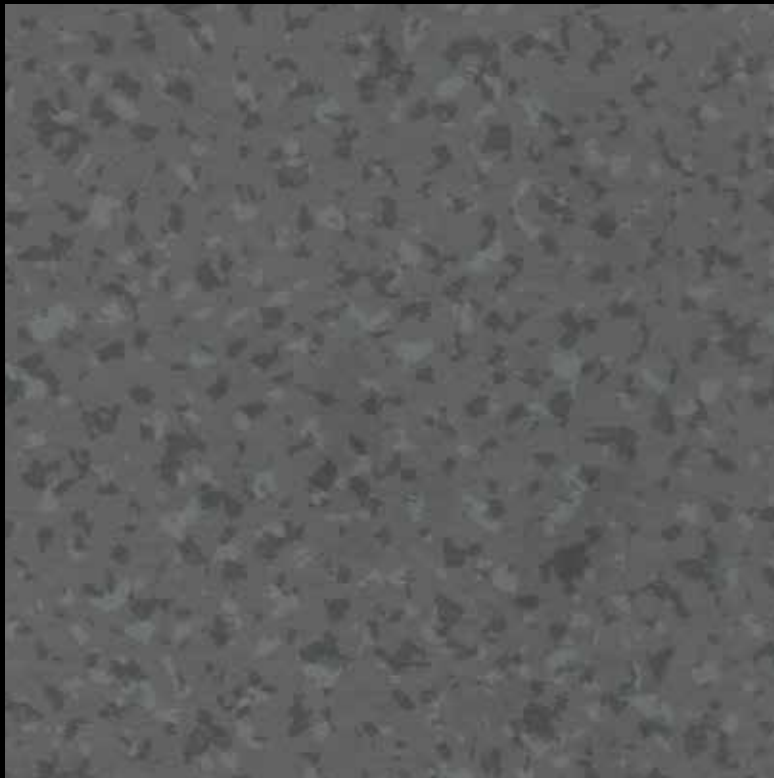

TAJ-8002Y Lockdown Medium | 18" x 18" Interlocking Tile

For samples call 888-652-2111 or visit us at tajflooring.com

Technical Specification Information

Classification: ASTM F1700 Class III, Type B (embossed)

Overall Thickness: 5.0mm

Dimensions:

18" x 18" Interlocking Tile

36" x 36" Interlocking Tile

*Special Order - Minimums Apply
Contact Customer Service

Wear Layer Thickness: .5mm, 20mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech Plus ceramic bead infused, EPA approved active anti-bacterial (non NanoSilver) UV cured urethane coating technology. Provides two times better scratch resistance than typical urethane coatings.

Edge Detail: Precision Cut Interlocking System

Warranty: 15 year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing or the use of toxic chemicals.

Static Load Limit: ASTM F970 modified, passes at 1000psi residual compression maximum 0.005".

Chemical and Stain Resistance: ASTM F925, Excellent No surface dulling, surface attack, or color change with 5% acetic Acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

Slip Resistance: ASTM C1028-89, >0.6

Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesives: LED IEQ4.1

Recycled Content: Post Consumer and Post Industrial Recycled Content Present*

Impact Sound Conduction: ASTM E492, IIC 57

Indoor Air Quality: CHPS 1350 Certified

Indoor Air Quality: FloorScore Certified

Plant Certifications: ISO14001, ISO9001

Trade Agreements Act (TAA) Compliant

*For detail on Health and Environmental Product Declarations, recycled content and airborne sound conduction please email request to info@tajflooring.com



Floor Over
Floor
Encapsulation



Fast and Easy
Installation
(No Glue Needed)



Environmentally
Friendly



100%
Recyclable



Easy Care

Visit us at tajflooring.com for complete specifications and to order samples.



740 Church Road • Elgin, IL 60123

(888) 652-2111 • fax (847) 690-9931 • tajflooring.com

