



PHTHALATE FREE SHEET VINYL



TAJ-250 Warm Gray



NVH-2701 River Birch



Phthalate Free

To improve indoor quality, TAJ has taken steps to eliminate phthalates in both their sheet and coordinating LVT.



Easy Care

Product surface textures thoughtfully designed to allow routine maintenance to be more effective.




Ceramic Bead Infused Urethane

Provide two times better scratch resistance than typical urethane coatings. This coating is anti-bacterial, anti-fungal, EPA approved non-nano silver.



HPD & EPD Certified

TAJ works to supply Health Product Declaration and Environmental Product Declaration to support ingredient and environmental impact transparency.



Coordinating LVT

TAJ offers coordinating sheet and LVT products in complimentary patterns and colors.



Stain & Chemical Resistant

TAJ Majestic products meet ASTM F925 and are ideal for medical and wellness settings.



TAJ-214 Harvest Maple



TAJ-214 Harvest Maple



TAJ-086 Medium Maple




TAJ-250 Warm Gray




TAJ-258 Twilight

Samples available at tajflooring.com

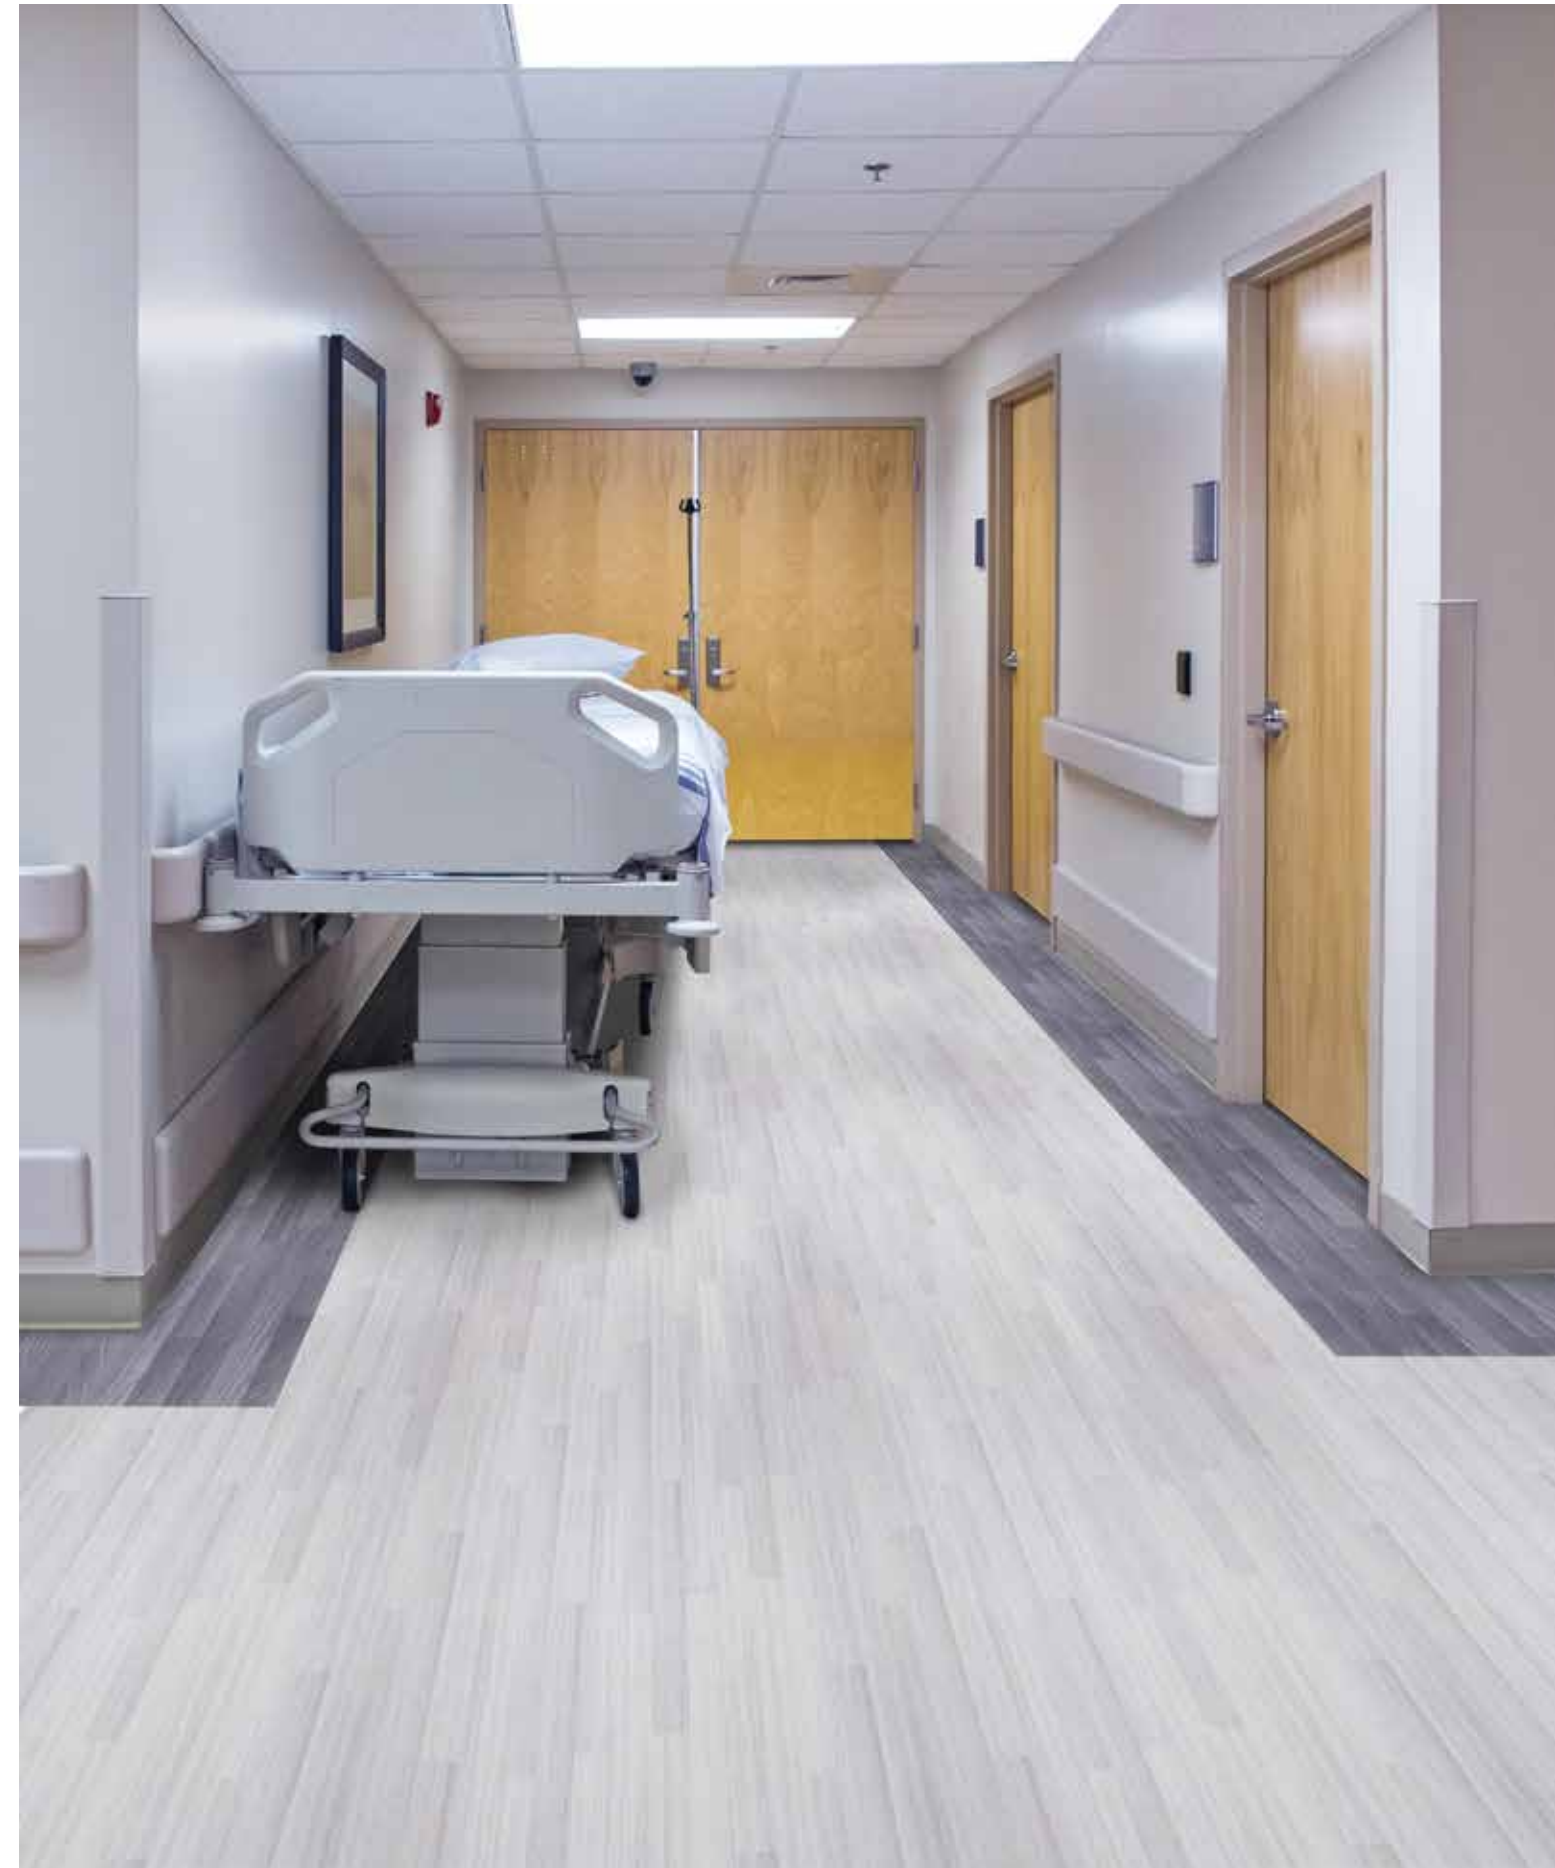

TAJ-252 Lighthouse (field) and TAJ-258 Twilight (border)

Samples available at tajflooring.com

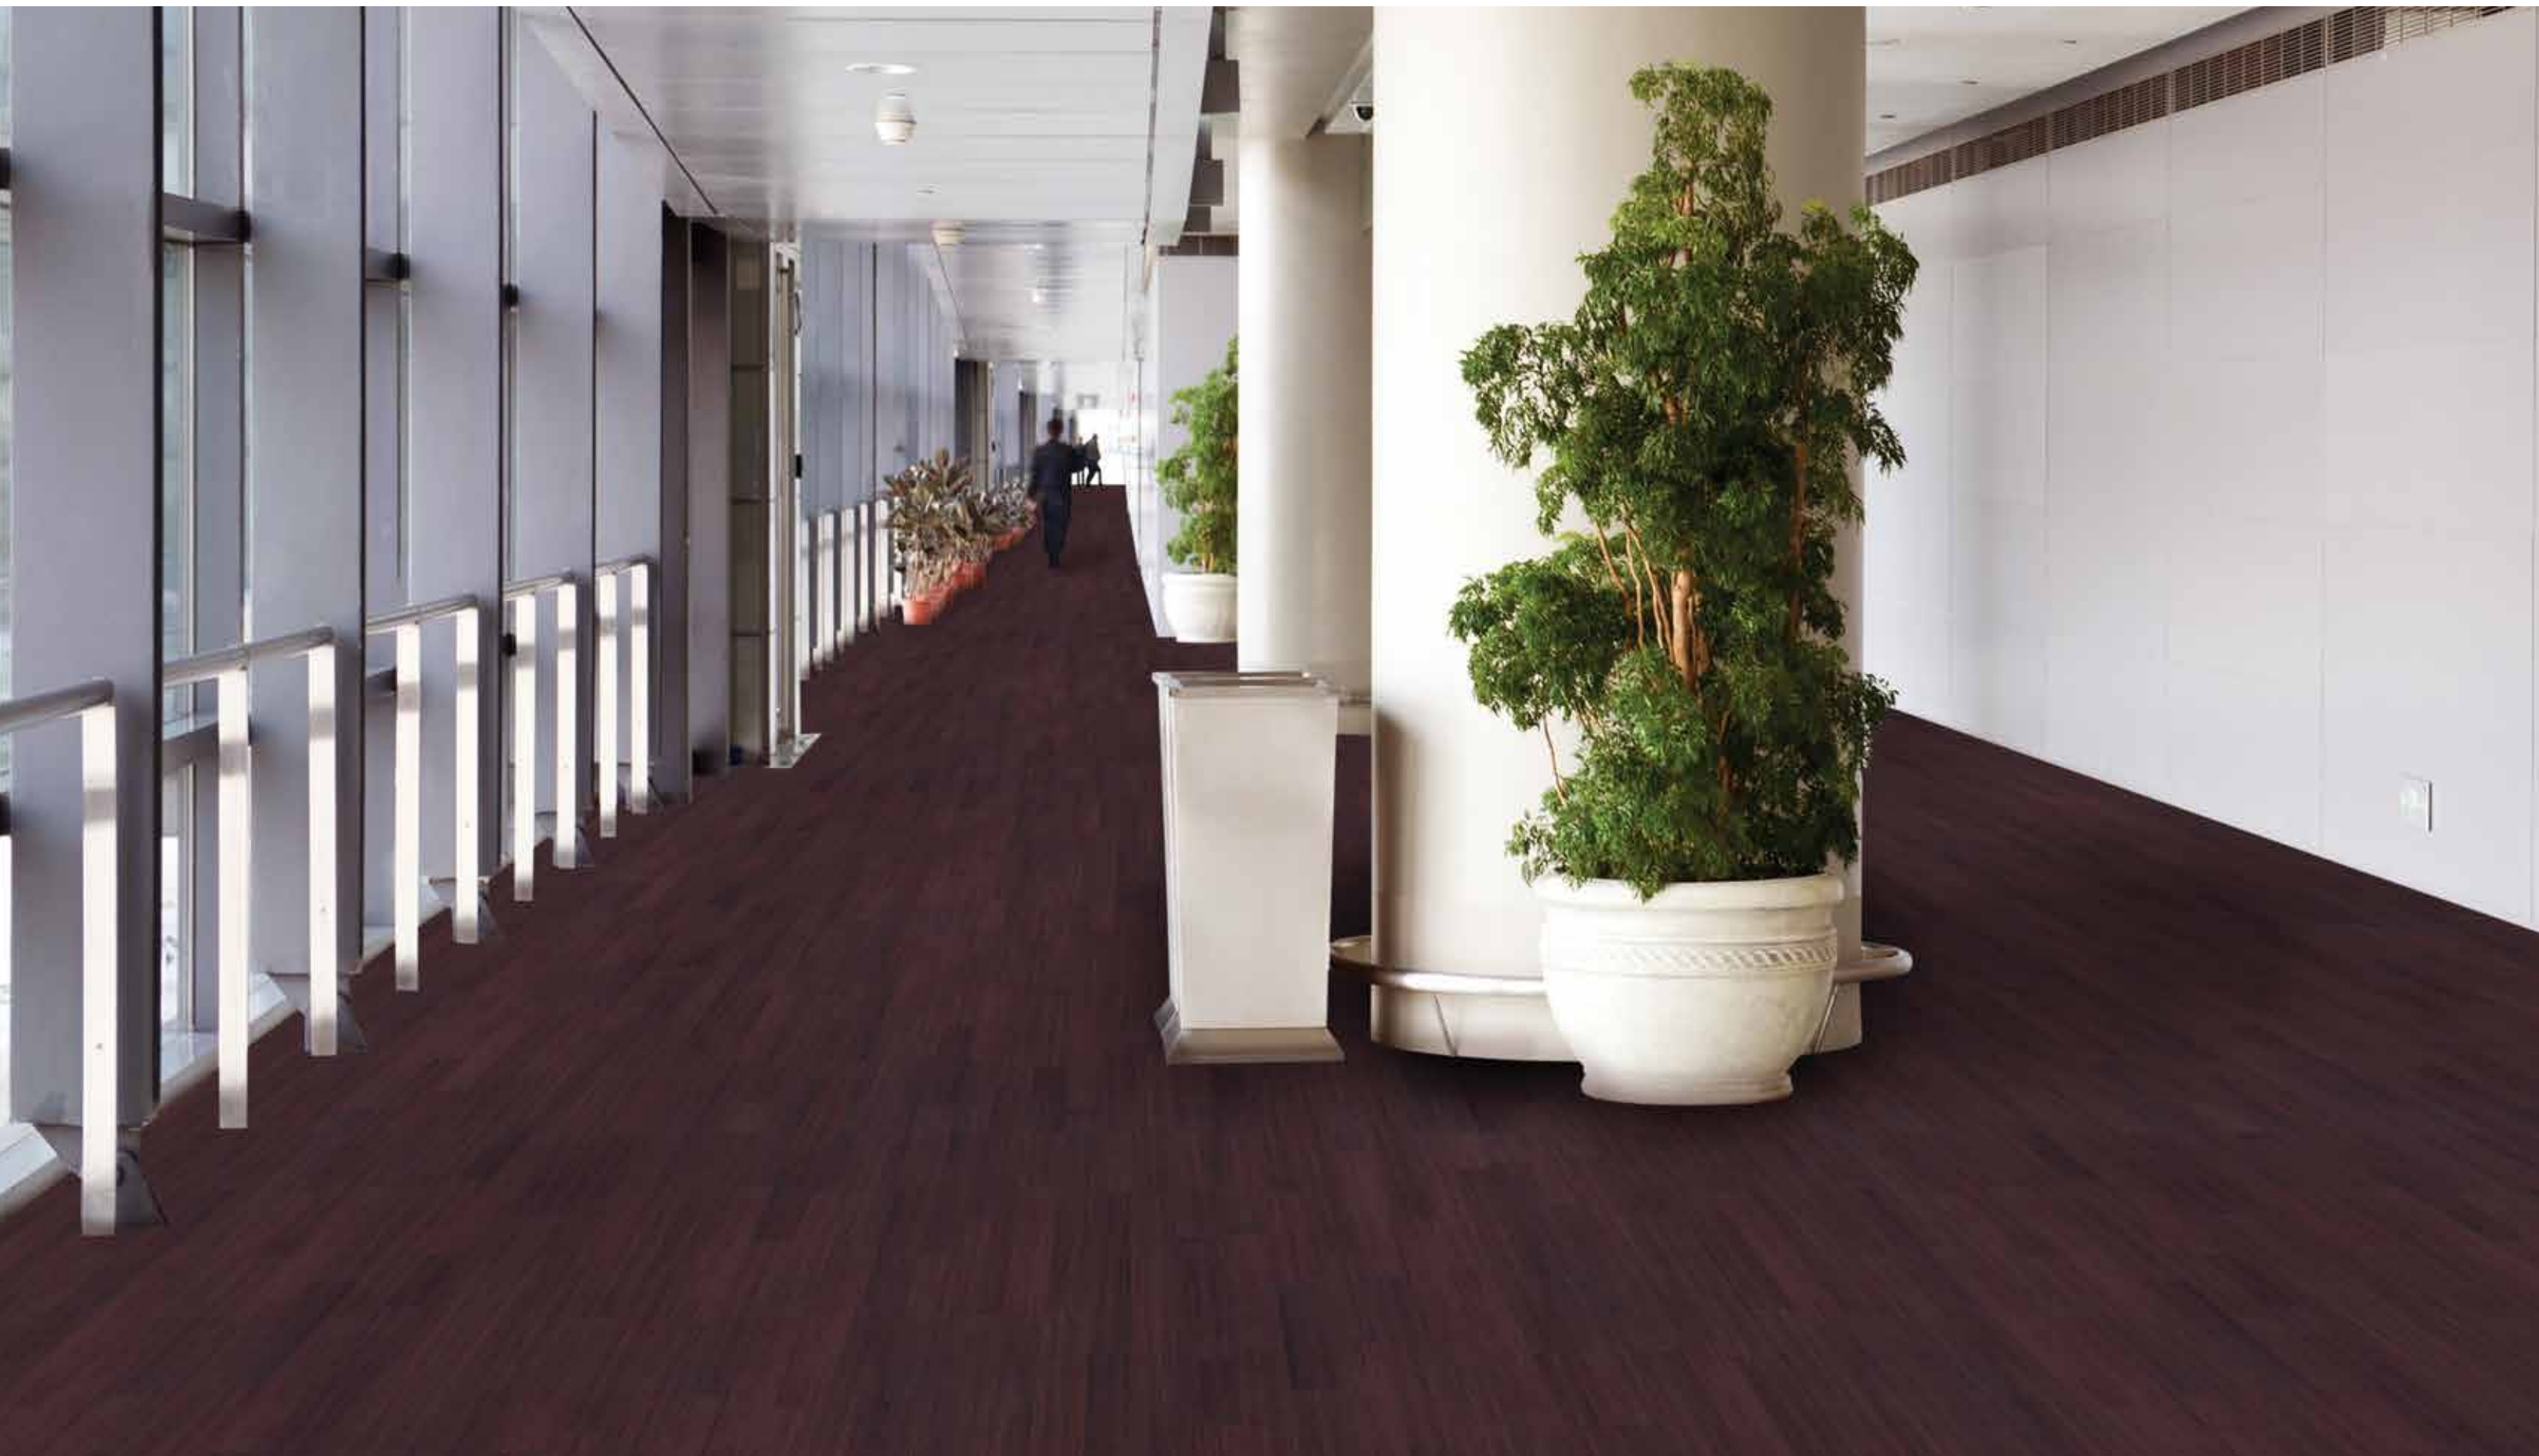

TAJ-254 Plantation

Samples available at tajflooring.com

Samples available at tajflooring.com



TAJ-211 Chestnut

Samples available at tajflooring.com



TAJ-252 Lighthouse



TAJ-211 Chestnut



TAJ-210 Antique Wood



TAJ-253 Thicket



TAJ-254 Plantation

Samples available at tajflooring.com



TAJ-255 Sundail



TAJ-256 Oak



TAJ-261 Honey Tree



TAJ-208 Walnut



TAJ-260 Terrace



TAJ-257 Orchard



TAJ-256 Oak

Technical Specification Information

High performance phthalate free fiberglass reinforced low maintenance antimicrobial heterogeneous commercial sheet flooring product with ceramic bead infused UV cured urethane coating.

Classification: ASTM F1303, Type 1, Grade 1, Backing Class B

Overall Thickness: 2mm (0.080 inches)

Wear Layer Thickness: 0.5 mm (20 mil)

Roll Size: 6'x 65'6", 43.67 sy per roll

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech Plus ceramic bead infused, EPA approved anti-bacterial, anti-fungal UV cured urethane coating technology. Provides two times better scratch resistance than typical urethane coatings.

Warranty: 15 Year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing or the use of toxic chemicals.

Static Load Limit: ASTM F970 modified, passes at 1100 psi. Residual compression maximum 0.005".

Chemical and Stain Resistance: ASTM F925, No surface dulling, surface attack, or color change with 5% acetic acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

Slip Resistance: ASTM C1028-89, >0.6, DIN 51130:2014, R10 Exceeds ADA Requirements

Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesive: LEED EQ4.1

Indoor Air Quality: CHPS 1350 Certified

Indoor Air Quality: FloorScore Certified

Plant Certifications: ISO14001, ISO9001

Trade Agreements Act (TAA) Compliant



*For detail on Health and Environmental Product Declarations, please email request to info@tajflooring.com

Visit us at tajflooring.com for complete specifications and to order samples.



740 Church Road, Elgin, IL 60123
(888) 652-2111 | tajflooring.com

