PHOENIX



PREMIUM LVT PLANKS & TILES









TAJ-503G Copper | 17.72" x 35.43"



TAJ-504G Iron | 17.72" x 35.43"




TAJ-505G Cobalt | 17.72" x 35.43"



TAJ-506G Blued Steel | 17.72" x 35.43"

Visit tajflooring.com for more images of all colors

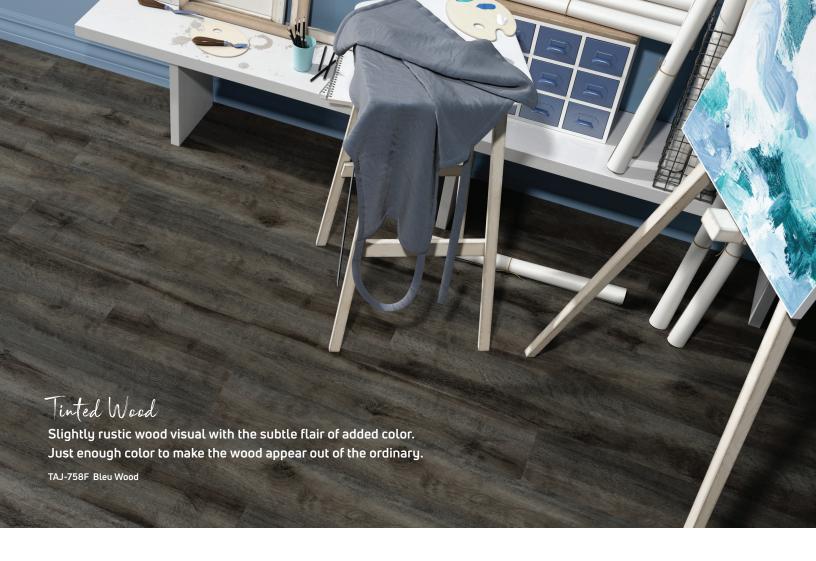





TAJ-758F Bleu Wood | 7" x 48"





TAJ-759F Yella Wood | 7" x 48"

TAJ-502G Rust Patina | 17.72" x 35.43"

TAJ-501G Oil Stained | 17.72" x 35.43"











TAJ-804W Strata Crème | 12" x 24"

TAJ-805W Strata Graphite | 12" x 24"

TAJ-810W Strata Earth | 12" x 24"










TAJ-753F Mercury | 7" x 48"

TAJ-754F Earth | 7" x 48"

TAJ-755F Jupiter | 7" x 48"

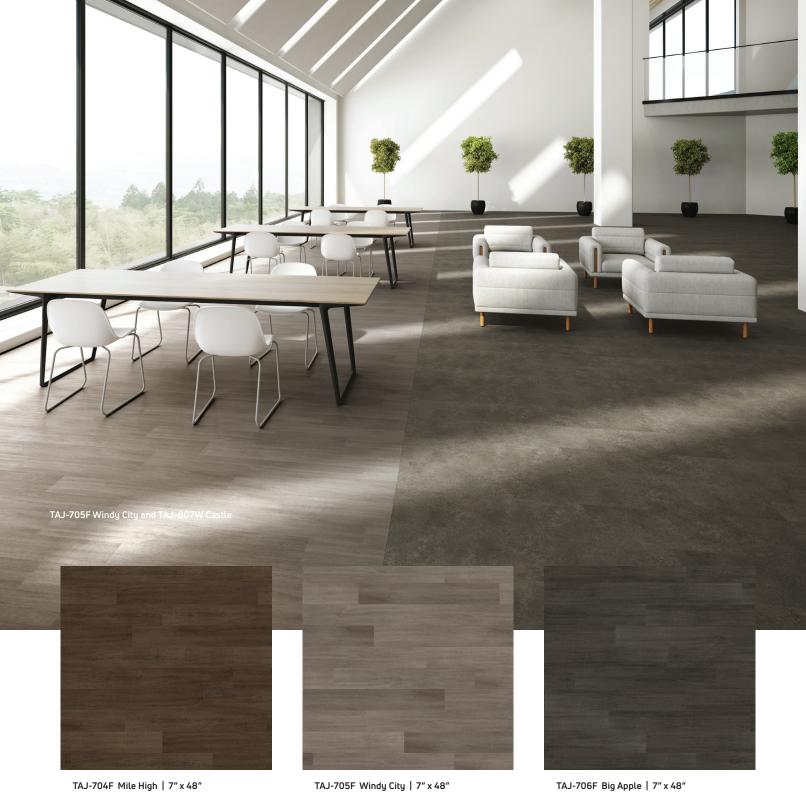



TAJ-807W Castle | 12" x 24"



TAJ-808W Cottage | 12" x 24"



TAJ-750F Denver | 7" x 48"



TAJ-751F Albany | 7" x 48"



TAJ-682H Mocha | 6" x 36"



TAJ-628H Blonde | 6" x 36"



TAJ-812W Tidal Wave | 12" x 24"



TAJ-811W Hurricane | 12" x 24"



TAJ-708F Cabin | 7" x 48"



TAJ-744F Vintage | 7" x 48"





TAJ-709F Espresso | 7" x 48"



TAJ-792F Variable Oak | 7" x 48"



TAJ-757F Manchester | 7" x 48"




TAJ-703F Gray Barnwood | 7" x 48"

TAJ-756F Yakisugi | 7" x 48"









TAJ-801W Textile Jet | 12" x 24"

TAJ-802W Textile Umber | 12" x 24"

TAJ-803W Textile Taupe | 12" x 24"

Technical Specification Information

Classification: ASTM F1700 Class III, Type A (Smooth)

Type B (Embossed)

Overall Thickness: 3.0mm, .118", Nominal 1/8"

Wear Layer Thickness: 0.7mm, 28mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech Plus

Ceramic bead infused, EPA approved active anti-bacterial (non NanoSilver) UV cured urethane coating technology. Provides two times better scratch resistance than typical

urethane coatings.

Edge Detail: Square Edge (no bevel)

Warranty: 20 Year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing or

the use of toxic chemicals

Static Load Limit: ASTM F970 modified, passes at 1,100 psi, residual compression maximum 0.005"

Chemical and Stain Resistance: ASTM F925, Excellent No surface dulling, surface attack, or color change with 5% acetic Acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

Slip Resistance: ASTM C1028-89, >0.6 Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450
Low Emitting Flooring: LEED IEQ4.3
Low Emitting Adhesives: LED IEQ4.1

Recycled Content: Post Consumer and Post Industrial

Recycled Content Present*

Indoor Air Quality: CHPS 1350 Certified Indoor Air Quality: FloorScore Certified Plant Certifications: IS014001, IS09001 Trade Agreements Act (TAA) Compliant















Revit files available for download at tajflooring.com.

*For detail on Health and Environmental Product Declarations and recycled content, please email request to info@tajflooring.com

Visit us at tajflooring.com for complete specifications and to order samples.

