



MODULAR ACOUSTIC FLOORING

## 7" x 48" Plank




TAJ-6524D Shabby Chic | 7" x 48" Plank



TAJ-6512D Argent | 7" x 48" Plank




TAJ-6523D Cinder | 7" x 48" Plank

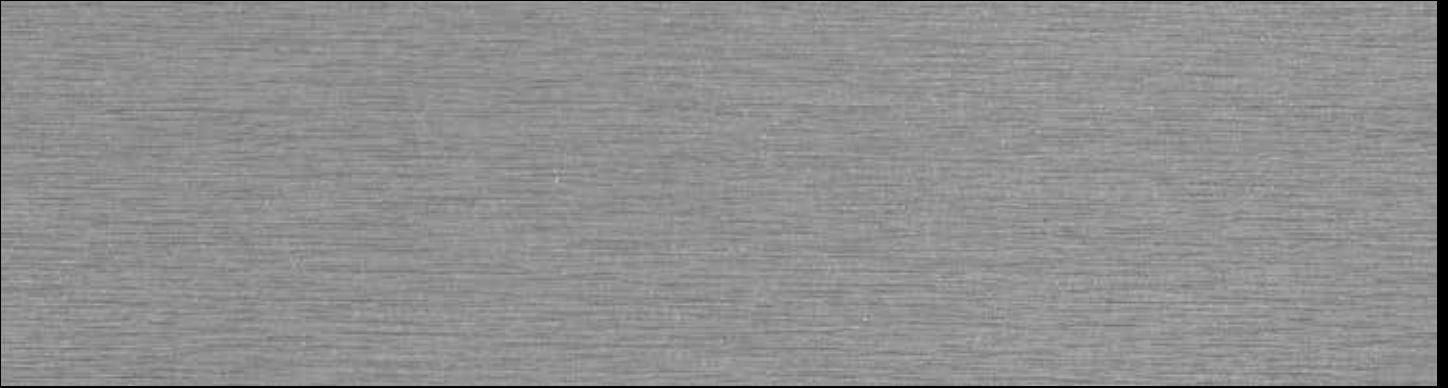

TAJ-6514D Zephyr | 7" x 48" Plank



TAJ-6515D Silver Streak | 7" x 48" Plank

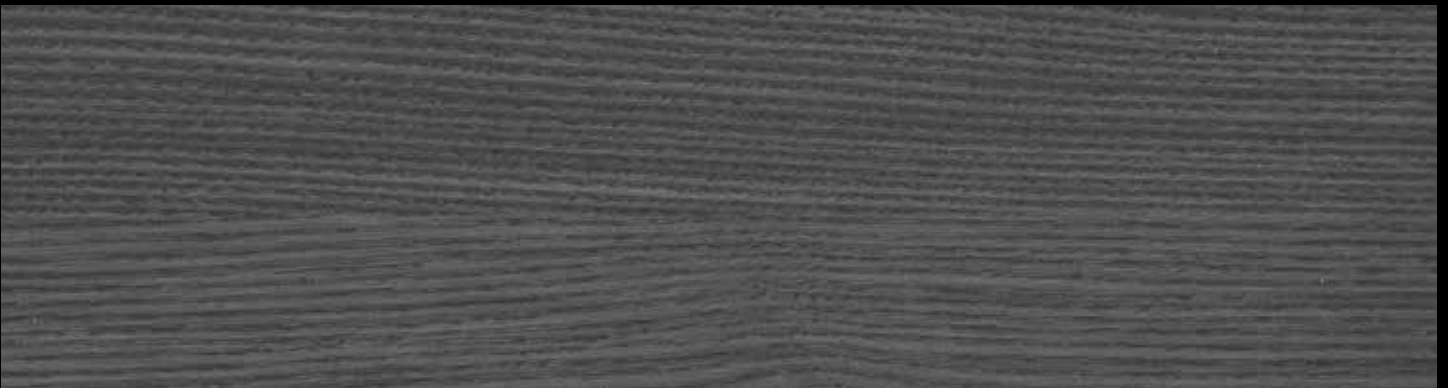

TAJ-6513D Smoke | 7" x 48" Plank

**NEW! 12" x 24" Slab**



**TAJ-6518C Muslin | 12" x 24" Slab**



**TAJ-6519C Hopsack | 12" x 24" Slab**



**TAJ-6522C Flannel | 12" x 24" Slab**





**TAJ-2801C Pearl | 12" x 24" Slab**



**TAJ-6521C Fawn | 12" x 24" Slab**



**TAJ-6520C Storm | 12" x 24" Slab**


**20" x 20" Tile**



**TAJ-6510J Pashmina | 20" x 20" Tile**



**TAJ-6509J Cashmere | 20" x 20" Tile**

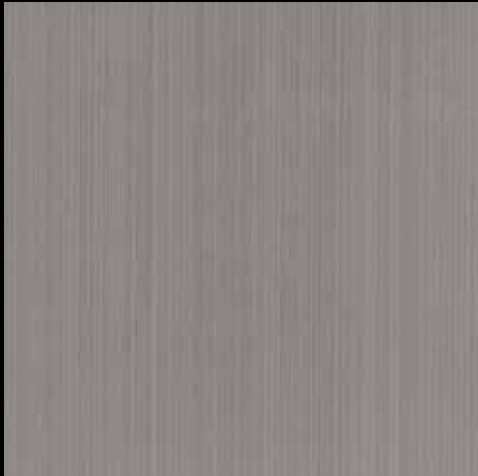

**TAJ-3035J Nickel | 20" x 20" Tile**



**TAJ-3036J Carbon | 20" x 20" Tile**



**TAJ-3242J Gravel | 20" x 20" Tile**



TAJ-3301P Maple | 8" x 40" Plank



TAJ-3302P Elm | 8" x 40" Plank



TAJ-6026P Blackbean | 8" x 40" Plank



TAJ-3313P Walnut | 8" x 40" Plank



TAJ-5011P Coffee Tree | 8" x 40" Plank

## Technical Specification Information

**Classification:** ASTM F1700 Class III, Type A (smooth)  
Type B (embossed)

**Overall Thickness:** 5.0mm

**Dimensions:**

Plank 7"x48" nominal (7.09" x 47.28" actual)

Plank 8"x40" nominal (7.87" x 39.37" actual)

Tile 20"x20" nominal (19.66" x 19.66" actual)

Slab 12"x24" nominal (12.0" x 24.0" actual)

**Wear Layer Thickness:** .5mm, 20mil

**Wear Layer:** High Molecular Weight Polymerized Vinyl

**Finish:** Protech Plus (Ceramic Bead Infused UV Cured Polyurethane with NanoSilver anti-microbial technology)

**Edge Detail:** Square Edge (no bevel)

**Warranty:** 15 year Commercial Warranty

**Maintenance:** Requires no wax, no stripping, no buffing or the use of toxic chemicals

**Static Load Limit:** ASTM F970 modified, passes at 1000psi  
Residual compression maximum 0.005"

**Chemical/Stain Resistance:** ASTM F925, Excellent  
No surface dulling, surface attack, or color change with 5% acetic Acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

**Slip Resistance:** ASTM C1028-89, >0.6

**Flame Spread:** ASTM E648, >.45, Class 1

**Smoke Density:** ASTM E662, <450

**Low Emitting Flooring:** LEED IEQ4.3

**Low Emitting Adhesives:** LED IEQ4.1

**Recycled Content:** Post Consumer and Post Industrial Recycled Content Present\*

**Impact Sound Conduction:** ASTM E492, IIC 57

**Indoor Air Quality:** CHPS 1350 Certified

**Indoor Air Quality:** FloorScore Certified

**Plant Certifications:** ISO14001, ISO9001

Trade Agreements Act (TAA) Compliant

## Product Features

Fiberglass reinforced construction and non-slip backing allow for multiple installation methods.

Excellent flooring for limiting sound transmission creating quiet environments.

Extra thick product provides great comfort under foot.

Modular construction works well next to carpet tile. Transition strips generally not needed.

Appropriate for use over raised access floors using releasable carpet tile adhesives.

New and improved ceramic beading coating. No wax required.

\*For detail on Health and Environmental Product Declarations, recycled content and airborne sound conduction please email request to [info@tajflooring.com](mailto:info@tajflooring.com)

Visit us at [www.tajflooring.com](http://www.tajflooring.com) for complete specifications and to order samples!



740 Church Road • Elgin, IL 60123

(888) 652-2111 • fax (847) 690-9931 • [tajflooring.com](http://tajflooring.com)

