



COLOR INFUSED

MODULAR ACOUSTIC FLOORING 5MM LVT

Inspire and design with color. The Color Infused Modular Acoustic Flooring collection offers a selection of three coordinating designs — Board, Batten and Buff — in eight various colorways.

Our 5mm luxury vinyl modular options are commercial-grade tile and plank formats providing sound absorption qualities without the need for an additional underlayment. The loose lay installation option makes this product easy to use in a traditional installation or with raised access flooring, and features the durability and performance of vinyl.









Sound **Absorption**



No Need for Acoustic Underlayment



Easy Care

















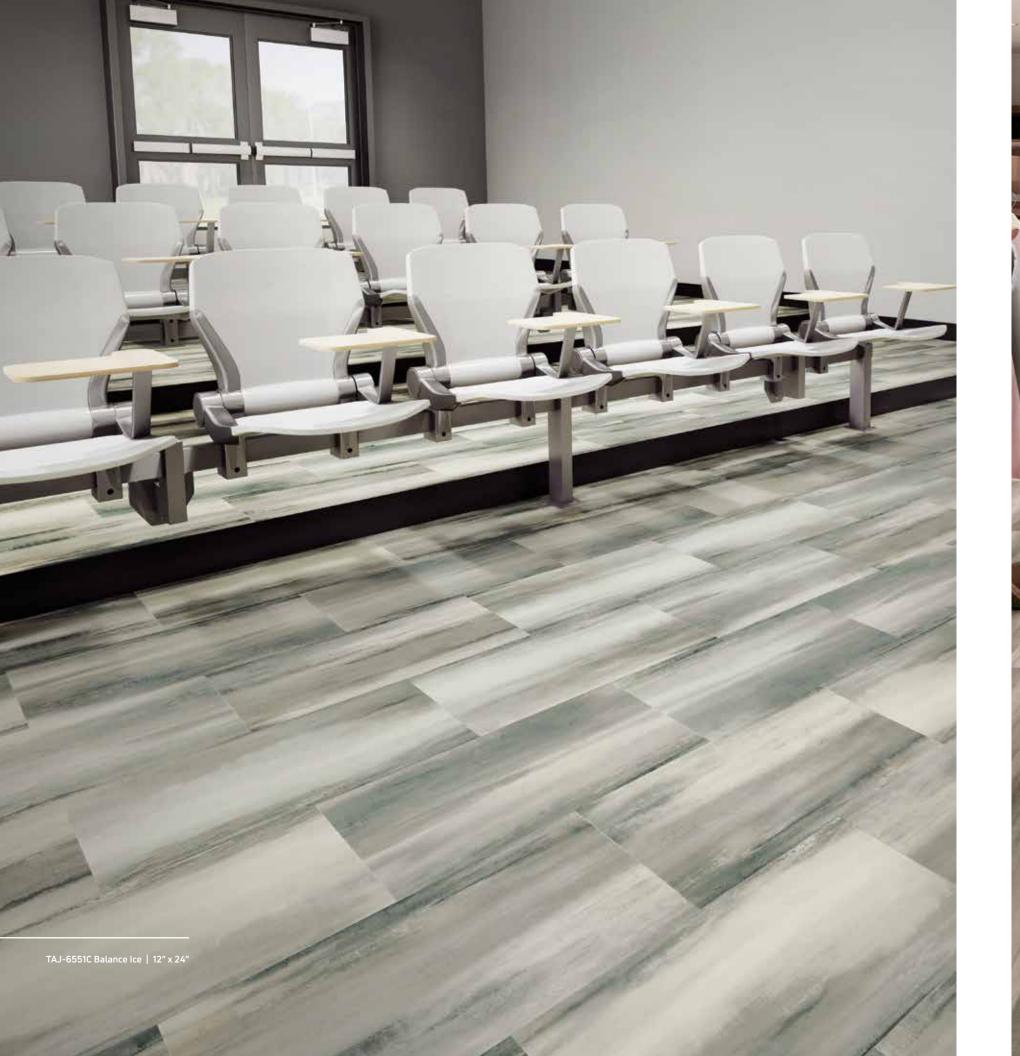





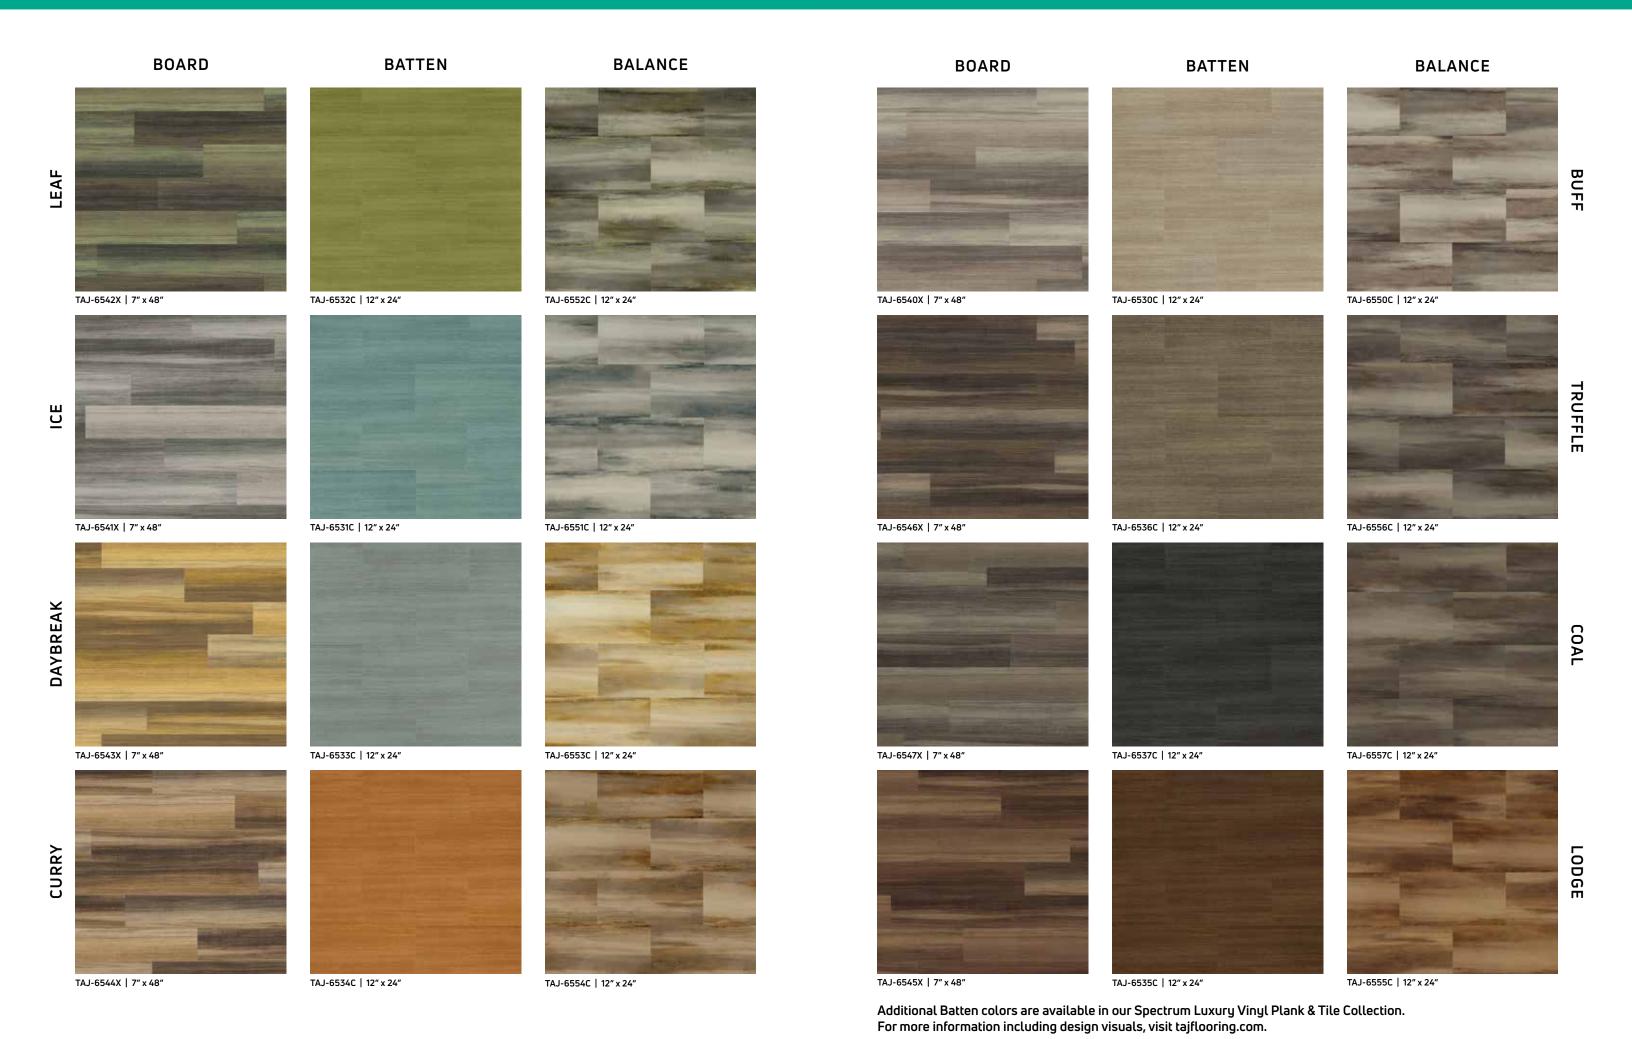



For additional 5mm modular acoustic flooring options, view our Wavelength Modular Acoustic Flooring collection.

Technical Specification Information

TAJ Color Infused Modular Acoustic Flooring is a high-performance 5mm fiberglass reinforced product with a non-slip backing. This advanced modular construction allows for multiple installation options in a variety of commercial end use applications. Color Infused is appropriate for use over raised access floor panels, excellent for limiting sound transmission, and installs next to carpet tile without the need for transition strips.

Classification: ASTM F1700 Class III

Type B (embossed)

Overall Thickness: 5.0mm

Dimensions:

Plank 7" x 48" (actual) Slab 12" x 24" (actual)

Wear Layer Thickness: .5mm, 20mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech Plus (Ceramic Bead Infused UV Cured

Polyurethane with anti-microbial technology)

Edge Detail: Square Edge (no bevel)

Warranty: 20 year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing

or the use of toxic chemicals

Static Load Limit: ASTM F970 modified, passes at 1,000 psi, residual compression maximum 0.005"

Chemical and Stain Resistance: ASTM F925, No surface dulling, surface attack, or color change with 5% acetic Acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive

Slip Resistance: ASTM C1028-89, >0.6 Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesives: LED IEQ4.1

Impact Sound Conduction: ASTM E492, IIC 57

Airborne Sound Transmission Loss: ASTM E90, STC 62

Indoor Air Quality: CHPS 1350 Certified Indoor Air Quality: FloorScore Certified Plant Certifications: ISO14001, ISO9001













Revit files available for download at tajflooring.com.

*For details on Health and Environmental Product Declarations, and recycled content, please email request to info@tajflooring.com.

Visit us at tajflooring.com for complete specifications and to order samples.

