


LVT PLANKS & TILES



TAJ-8000H Carter

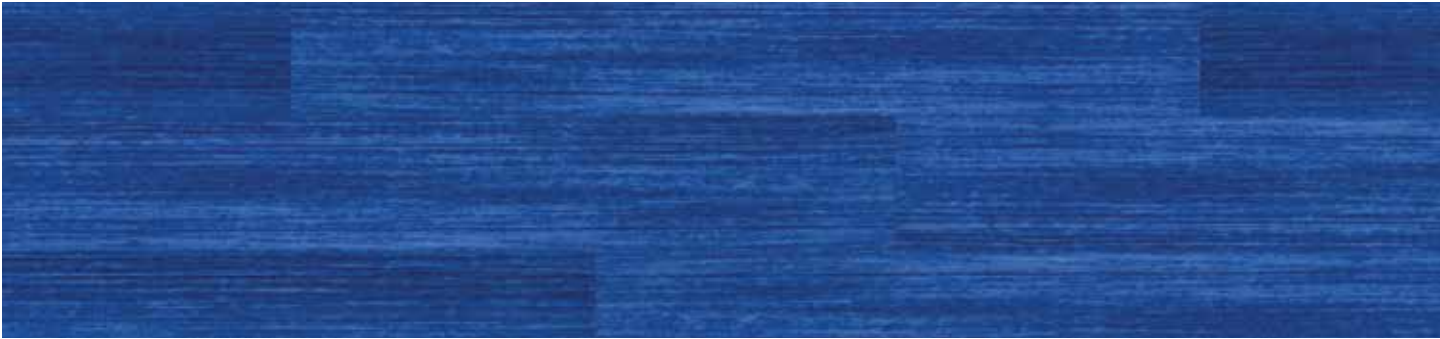

TAJ-8001H Nelson



TAJ-8002H Jovi



TAJ-8003H Lambert



Visit tajflooring.com to view additional size options.



TAJ-8008H Wallace



TAJ-8009H Marley



TAJ-8010H Franti



TAJ-8011H Winehouse





TAJ-8007H Strait



TAJ-8015H Rateliff



TAJ-8006H Mayer



TAJ-8014H Stapleton



TAJ-8005H Groban



TAJ-8013H Howard



TAJ-8004H Haggard



TAJ-8012H Jagger



TAJ-8018H Vaughan



TAJ-8017H Clapton



TAJ-8016H King



TAJ-8020H Hendrix



TAJ-8019H Morrison



TAJ-8021H Zeppelin



TAJ-8022H Adele



TAJ-8023H Jones



TAJ-8024H Manilow

Technical Specification Information

Classification: ASTM F1700 Class III, Type A (Smooth)
Type B (Embossed)

Overall Thickness: 3.0mm, .118", Nominal 1/8"

Dimensions: Plank 6" x 36" Nominal

Wear Layer Thickness: 0.5mm, 20mil

Wear Layer: High Molecular Weight Polymerized Vinyl

Finish: Protech UV Cured Polyurethane

Edge Detail: Square Edge (no bevel)

Warranty: 15 Year Commercial Warranty

Maintenance: Requires no wax, no stripping, no buffing or the use of toxic chemicals

Static Load Limit: ASTM F970 modified, passes at 1100psi, residual compression maximum 0.005"

Chemical and Stain Resistance: ASTM F925, No surface dulling, surface attack or color change with 5% acetic acid, 70% isopropyl alcohol, mineral spirits, 5% sodium hydroxide, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, and olive oil.

Slip Resistance: ASTM C1028-89, >0.6

Flame Spread: ASTM E648, >.45, Class 1

Smoke Density: ASTM E662, <450

Low Emitting Flooring: LEED IEQ4.3

Low Emitting Adhesives: LEED IEQ4.1

Recycled Content: Post Consumer and Post Industrial Recycled Content Present*

Environmental Product Declaration (EPD) available upon request*

Indoor Air Quality: CHPD 1350 Certified

Indoor Air Quality: FloorScore Certified

Plant Certifications: ISO14001, ISO9001

Trade Agreements Act (TAA) Compliant



Revit files available for download at tajflooring.com.



*For detail on Health and Environmental Product Declarations, please email request to info@tajflooring.com

Visit us at tajflooring.com for complete specifications and to order samples.



740 Church Road, Elgin, IL 60123
(888) 652-2111 | tajflooring.com